


PROJOLLY SQUARE

The PROJOLLY SQUARE, available in 18 colors with EAN BAR CODE, facilitates installation, eliminating the fragile ceramic trim. It is used for outside corners of tiles to complete the finish of wall coverings, decking, steps, bath-tubs, etc. Impeccable, precise work is ensured with a superior aesthetic effect. It strengthens the tile edge, thereby preventing chipping and breakages. It is made in certified impact-resistant non toxic PVC. Required by European standards for safety and hygiene in public and private environments. End caps and three-way inside and outside corner linking elements are available.

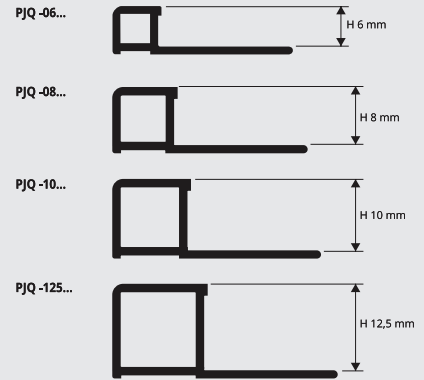

NON-TOXIC SHOCKPROOF VINYL RESIN
 bar length **2,7 lm** - pack. **54 lm** (white colour pack. **108 lm**)


| Article | H mm | | |
|-------------|------|--|--|
| PJQ 01-06 | 6 | | |
| PJQ -08... | 8 | | |
| PJQ -10... | 10 | | |
| PJQ -125... | 12,5 | | |

Available in the colours: 0106-17-12-06-03-01.
 Available on demand -19-16-15-14-13-11-10-09-08-07-05-04-02
 29-28-27-26-25-24-23-22-21-20 with a minimum quantity order
 of 2160 lm.
 The code of the selected colour must be added to the article code.
 E.g.: PJQ -08... (chosen colour white) PJQ 01-08.


WHITE NOT FOR SALE SINGLY

1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired colour.
2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

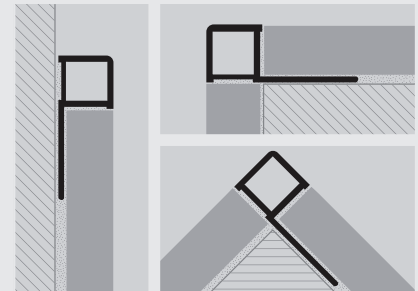

COLOURS

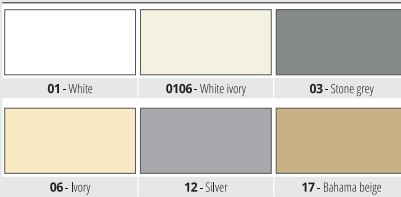

AVAILABLE MINIMUM QUANTITY 5400 LM by colour and height (price and delivery time to be agreed)

