


## MASKING TAPE

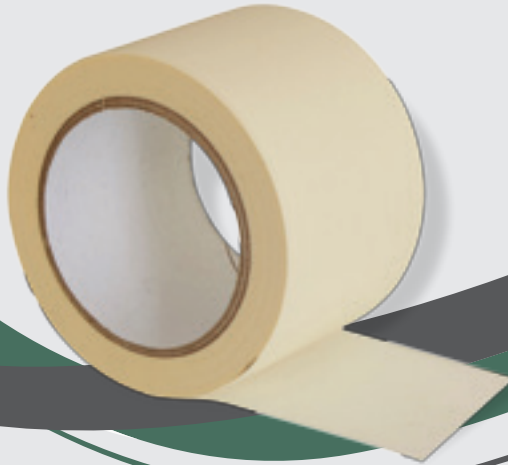

### PRODUCT DESCRIPTION

Crepe Paper coated with Cured natural rubber adhesive. Ideal use for auto painting, outdoor painting, masking, packing, marking, bundling, splicing and general applications.

### TYPICAL PHYSICAL PROPERTIES

Total Thickness	150 micron
Backing	Crepe Paper
Adhesive	Cured Natural Rubber
Total Weight	91 ±3g/m <sup>2</sup>
Steel Adhesion (ASTM D 3330)*	0.80 kg/in
Tensile Strength (ASTM D 3759)*	9.9 kg/in
Elongation (ASTM D 3759)*	9 ± 3%
Initial Tack (PSTC 6)	<80mm
Max Temperature Resistance	95° C
Application Temperature	80° C
Colour	Yellow

Total thickness Allowance: 2± micron

### FEATURES

- UV Resistant
- Clean release after use
- Easy Tear
- Able to stand extreme temperature
- Usable on all surfaces

### TYPICAL APPLICATIONS

Auto painting, Outdoor painting, Masking, Packing, Marking, Bundling, Splicing, General applications, Gift wrapping, Advertising, Decorations etc.

### STORAGE & SHELF LIFE

Product should be stored in a cool, dry area in original packing and to use within 12month of shipment stored at 21°C (70°F) / 50% relative humidity out of direct sunlight.

### SURFACE PREPARATION

It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied need to be clean, dry, and free of grease, oil or other contaminants.

### PRODUCT USE

It is essential that the user evaluate the Asmaco tape product to determine whether it is fit for a particular purpose and user's method of application. Good results will be obtained when applied to a clean, dry surface with a suitable pressure on the Asmaco Tape product between +10 ~ +60°C (+50 ~ +140 °F).

**LOCATION**

