



UNITECH

Isam Kabbani Group of Companies
www.unitech-ikk.com | www.unipro-ikk.com

INSULATION AND PROTECTION SOLUTIONS

EXPANDED POLYSTYRENE (EPS) THERMAL INSULATION BOARDS

EPS CHARACTERISTICS

- Heat resistant
- Low thermal conductivity
- High permanent R - value
- High compressive strength
- Excellent shock absorption
- Excellent dimensional stability
- Low water absorption
- Reflective white color
- Non - dusting
- Will not rot, mildew or support bacterial growth
- Resistant to most acids and alkalis

EPS ADVANTAGES

- Energy saving
- Low material / installation costs
- Broad range of densities and sizes
- Easy to handle and apply
- Simple to cut and shape
- Tolerates broad range of temperatures
- Doesn't irritate skin
- Restricts moisture penetration
- Does not deplete the Earth ozone layer



DESCRIPTION

EEL Expanded Polystyrene is rigid and light - weighted. By controlling the density of expanding beads during the manufacturing process, EEL can custom produce insulation materials according to the specific requirements of customers applications. EEL production of Expanded Polystyrene boards and injection molded boards are in conformity with the British Standard specification BS 3837 : 1977 for expanded Polystyrene boards, DIN and ASTM (American Society for Testing and Materials).

Type N (Normal): It consists of 100% of closed cell polystyrene expandable beads.

Type A (Fire Retardant): It is similar to Type N, but meets additional requirements for the extent of burn when tested with the method given by virtue of BS 4735. This requirement is met by the incorporation of flame retardant additives and other appropriate modifications.

THICKNESS AND TOLERANCES

Thickness can be cut as required, from 8 mm up to 1120 mm. On specified thickness, length, and width, tolerance will be + - 2 mm.

MOLDED BOARDS

Molded boards are boards of injection molded from expanded beads, that has surface skin on all sides and molded edges.


CUT BOARDS

The large molded blocks are hot wire cut on flat lines at any desired thickness, width, and length. In addition, EEL CAD / CAM capabilities provide its customers with an infinite variety of standard, customs, and radius products. Cut boards are boards cut from a block molded from expanded beads, which could be fine, very fine, or coarse grain. Used raw materials could be of general purpose (type N material) or fire retardant category (type A material).

APPLICATIONS OF EXPANDED POLYSTYRENE INSULATION:

PRODUCT PARAMETERS

- Insulation of roofs, walls, and floors - Prefab houses and partitions
- Sound insulation
- Molded pipe insulation for air conditioning
- Insulation of hot and cold water lines
- Expansion joints
- Hourdis and void formers
- Insulation of deep - freeze rooms, cold stores, cold display cabinets and refrigerated vehicles
- Pipe insulation
- Wall insulation inserts

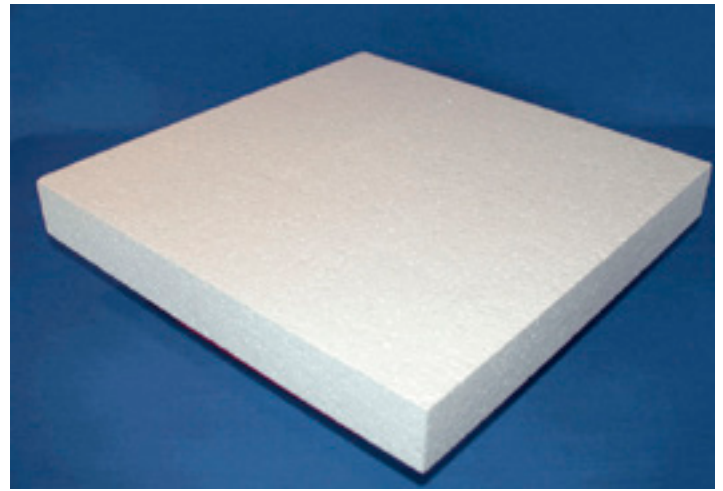

INSULATION PROPERTIES

DESCRIPTION

Injection Moulded Expanded Polystyrene closed cell expanded blue polystyrene panels. It features excellent thermal insulation properties, high compressive strength and very low absorption. EPS panels are moulded and have no cut sides.

Application of EPS for inverted membrane roofs:

EPS panels are recommended for any application requiring efficient thermal insulation, good resistance to moisture, and high mechanical strength. By virtue of its high compressive strength and low water absorption, EPS is ideal for the thermal insulation of inverted membrane roofs. EPS panels can be covered with concrete (or other material with sufficient loads capacity) to enable adequate ballasting and protection from U.V radiation, rain and storms. Water absorption by EPS panels is very low and has practically no adverse effect on thermal insulation.

Resistance to chemicals and outdoor exposure:


The resistance of EPS to chemicals, solvents, and aging is very much the same as that of the polystyrene (Extruded or cut-cell surface boards), from which it has been derived. EPS is immune to water and aqueous solution of salts, most acids and alkalis. Bonding EPS with emulsion or contact adhesive and bitumen will not affect its physical properties.

INSTALLATION

EPS panels can be worked with conventional wood working tools. The panels could be bound together with hot bitumen, dispersion - type structural or special adhesives. Instructions for use and safety precautions relating to the adhesive must be observed.

STABILITY

Unlike extruded panels, EPS is very stable in high temperatures; it does not warp and would not cause problems which often happen with other boards.

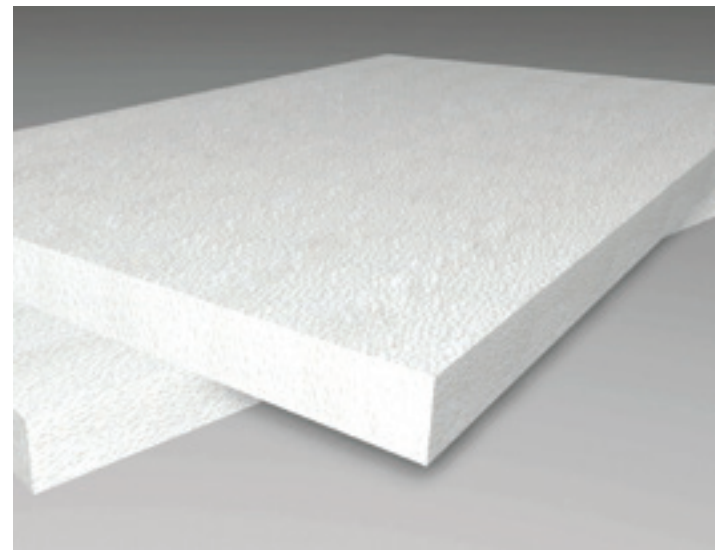

DIMENSIONS (L X B X T)

- 600 x 125 x 1 - 100 mm
- 600 x 100 x 1-100 mm
- 400 x 125 x 1 - 100 mm
- 400 x 100 x 1 - 100 mm
- 250 x 125 x 1 - 100 mm
- 230 x 100 x 1 - 100 mm
- 300 x 100 x 1 - 60 mm
- 200 x 100 x 1 - 50 mm



STANDARD GRADE				LD	SD	HD	EHD	UHD	SHD	XD	
GENERAL PROPERTIES OF THERMAL INSULATION		Method of Test	Unit Measurements	Type as per ASTM C 578 - 09							
				Type XI	Type I	Type VIII	Type II	Type IX	Type XIV	Type XV	
<p>• THERMAL RESISTANCE (R-VALUE) - Is The resistance to heat transfer through a material by conduction. It can be calculated by dividing the material thickness "d" by its thermal conductivity</p>											
THERMAL PROPERTIES	R-value, Thermal Resistance of 1.00-in.(25.4-mm) thickness. Mean Temperature: 75 ± 2°F (24 ± 1°C)	C 518	*F.ft ² -h/Btu	≥3.1	≥3.6	≥3.8	≥4.0	≥4.2	≥4.2	≥4.3	
			(K.m ²)/W	≥0.55	≥0.63	≥0.67	≥0.70	≥0.74	≥0.74	≥0.76	
	R-value, Thermal Resistance of 1.00-in.(25.4-mm) thickness. Mean Temperature: 95 ± 2°F (35 ± 2°C)		(K.m ²)/W	≥0.53	≥0.61	≥0.64	≥0.67	≥0.71	≥0.71	≥0.731	
<p>• THERMAL CONDUCTIVITY (k value) - is the rate of heat flow through one Square meter area of a 1m thick material in a perpendicular direction to the material surface. induced by 1*K temperature difference between its two surface.</p>											
THERMAL PROPERTIES	k - value. Thermal conductivity. Mean Temperature: 75 ± 2°F (24 ± 1°C)	C 518	Blu-in/h.ft ² °F	≤0.320	≤0.279	≤0.263	≤0.252	≤0.238	≤0.238	≤0.232	
			W/(m.K)	≤0.0462	≤0.0403	≤0.0379	≤0.0363	≤0.0343	≤0.0343	≤0.0334	
	k - value. Thermal conductivity. Mean Temperature: 95 ± 2°F (35 ± 2°C)		W/(m.K)	≤0.0482	≤0.0419	≤0.0394	≤0.0377	≤0.0356	≤0.0356	≤0.0347	
<p>FLEXURAL STRENGTH- Is its ability to endure a specific pressure Without cracking or breaking and to recover the original dimensions and size after removal of compressive load.</p>											
MECHANICAL PROPERTIES	Flexural Strength	C 203	psi	≥10	≥25	≥30	≥35	≥50	≥60	≥75	
			(kPa)	≥70	≥173	≥208	≥240	≥345	≥414	≥517	
	<p>• COMPRESSIVE STRENGTH - the strength of that the rigid Insulation exhibits when exposed to a certain stress.</p>										
MECHANICAL PROPERTIES	Compressive resistance at yield or 10% deformation. whichever occurs first (with skin Intact)	D1621	psi	≥5	≥10	≥13	≥15	≥5	≥40	≥60	
			(kPa)	≥35	≥69	≥90	≥104	≥173	≥276	≥414	
<p>• OXYGEN INDEX* - for measuring the minimum concentration of oxygen, expressed as percent volume, that will just support flaming combustion in a flowing mixture of oxygen and nitrogen.</p>											
FIRE RESISTANCE PROPERTIES	Oxygen Index	D2863	volume(%)	≥24							
	<p>• FLAME SPREAD INDEX* - a number or classification indication of oxygen, expressed as percent volume, that just support flaming combustion in a flowing mixture of oxygen and nitrogen.</p>										
	Flame Spread up to 6.00-in thickness	E84	Rating	≤75							
<p>• SMOKE DEVELOPED INDEX* - a number or classification indicating a comparative measure derived from smoke obscuration data collected during the test for surface burning characteristics.</p>											
FIRE RESISTANCE PROPERTIES	Smoke Development up to 6.00-in thickness	E84	Rating	≤450							
	<p>• DIMENSIONAL STABILITY - the insulation ability to maintain its shape and original dimensions, after applying it for a long time, due to the effects of aging, heat and humidity on the insulation.</p>										
PHYSICAL PROPERTIES	Dimensional Stability (change in dimensions)	D 2126	%	≤2.0							
	<p>• WATER VAPOUR PERMEANCE - measures the amount of moisture that diffuses through the insulation due to the difference in vapour pressure between its two surfaces.</p>										
	Water Vapour Permeance of 1.00-in. (25.4-mm) thickness	E 96	perm	≤5.0	≤5.0	≤3.5	≤3.5	≤2.5	≤2.5	≤2.5	
	(ng/Pa.s.m ²)		≤287	≤287	≤201	≤201	≤143	≤143	≤143		
<p>• WATER ABSORPTION - is expressed by the percentage of water (by volume or weight) that the insulation can absorb when it is completely flooded in water.</p>											
PHYSICAL PROPERTIES	Water Absorption by Total immersion	C 272	volume (%)	≤4.0	≤4.0	≤3.0	≤3.0	≤2.0	≤2.0	≤2.0	
	<p>• DENSITY - is the weight divided by the volume of material.</p>										
PHYSICAL PROPERTIES	Minimum Density	D 1622	lb/ft ³	0.7	0.9	1.15	1.35	1.8	2.4	2.85	
			(kg/m ³)	12	15	18	22	29	28	46	

As per Dubai Municipality Building Section Our Products are Under 75.00 Series

LOCATIONS

KIGDOM OF SAUDI ARABIA

unitech.ksa@ikkgroup.com

Jeddah

Tel : +966 12 627 8222
Fax: +966 12 627 8722

Jeddah - Ghurab Showroom

Tel : +966 12 667 2000
Fax: +966 12 661 4306

Mak kah/Taif

Tel : +966 12 541 1206
Fax: +966 12 532 1675

Mad inah

Tel : +966 14 842 1095
Fax: +966 14 842 1090

Yanbu

Tel : +966 14 390 1499
Fax: +966 14 322 7101

Khamis Mushayt

Tel : +966 17 237 5929
Fax: +966 17 237 8783

Najran

Tel : +966 17 546 3873
Fax : +966 17 546 3873

Al Baha

Tel : +966 17 237 5929
Fax: +966 17 237 8783

Sharorah

Tel : +966 17 532 8153
Fax: +966 17 532 8153

Gizan

Tel : +966 17 321 6660
Fax: +966 17 321 0665

Riyadh North

Tel : +966 11 415 5465
Fax: +966 11 456 6627

Riyadh South

Tel : +966 11 448 0112
Fax: +966 11 447 7421

Riyadh West

Tel : +966 11 431 6271
Fax: +966 11 431 7642

Riyadh East

Tel : +966 11 448 0112
Fax: +966 11 447 7421

Qassim / Buraidah

Tel : +966 16 382 3946
Fax: +966 16 385 2186

Hail

Tel : +966 16 543 3931
Fax: +966 16 543 3935

Skakah / Qurayyat

Tel : +966 14 626 3904
Fax: +966 14 626 3905

Tabuk

Tel : +966 14 423 5203
Fax: +966 14 423 5203

Hafr el Batin

Tel : +966 13 729 3644
Fax: +966 13 729 3644

Dammam

Tel : +966 13 859 0097
Fax: +966 13 857 8177

Jubail

Tel : +966 13 361 4390
Fax: +966 13 362 4499

Hofuf

Tel : +966 13 530 1474
Fax: +966 13 530 7144

FACTORIES

SFSP - KSA

sfsp.jeddah@ikkgroup.com

Specialized Factory for Steel Products

3rd Industrial City / Jeddah

Tel: +966 12 637 4482
Fax: +966 12 636 1963

SFSP / UAE

sfsp.uae@ikkgroup.com

SIGMA Factory for Steel Products

DIC (Dubai Industrial City)

Tel : +971 4 818 1919

SFSP / Egypt

sfsp.cairo@ikkgroup.com

Specialized Factory for Steel Products

6th of October City Giza

Tel : +20 2 3820 6477
Fax: +20 2 3820 6036

SFSP / Lebanon

sfsp.lebanon@ikkgroup.com

Specialized Factory for Steel Products

Tanayel, Bekaa

Tel: +961 8 514 290
Fax: +961 8 514 291

BAHRAIN

unitech.bahrain@ikkgroup.com

Manama

Tel : +973 17 874 897
Fax: +973 17 789 470

KUWAIT

unitech.kuwait@ikkgroup.com

Kuwait City

Tel : +965 2 4924 937
Fax: +965 2 4924 938

UNITED ARAB EMIRATES

unitech.uae@ikkgroup.com

Dubai - Al Rashidiyah

Tel : +971 4 2591 773
Fax : +971 4 2591 774

Abu Dhabi - Musaffah

Tel: +971 2 552 3393
Fax: +971 2 552 5499

OMAN

unitech.oman@ikkgroup.com

Muscat

Tel : +968 24 591 006
Fax : +968 24 597 006

JORDAN

unitech.jordan@ikkgroup.com

Amman

Tel : +962 6 556 3030
Fax: +962 6 554 7911

Aqaba

Tel : +962 6 556 3030
Fax: +962 6 554 7911

PAKISTAN

unitech.pakistan@ikkgroup.com

Karachi - Clifton

Tel-Fax : +92 21 35826120

EGYPT

unitech.egypt@ikkgroup.com

Cairo 6th of October City

Tel : +20 2 3820 6477
Fax: +20 2 3820 6036

LEBANON

unitech.lebanon@ikkgroup.com

Beirut

Tel : +961 1 858 277
Fax: +961 1 858 276

ENGINEERING, DESIGN, MARKETING & MULTIMEDIA

Unitech Deutschland GmbH

Germany

unitech.germany@ikkgroup.com

Stuttgart

Tel : +49 711 6868 7222
Fax: +49 711 6868 7223

Multi-D s.a.r.l

Lebanon

multi-d@ikkgroup.com

Multi-d Beirut

Tel : +961 1 841 155
Fax: +961 1 841 156

R&D DEPARTMENT

Saih Suhaib-3, Opp DEWA Substation, Dubai Industrial City, Dubai, UAE

Tel : +971 4 818 1944 - Mob: +971 55 517 0841

Email: unitech.uae@ikkgroup.com - abed.demachkieh@ikkgroup.com