



NEUTRAL WEATHER SEALANT

EAGLE SEAL WEATHER SEALANT



PRODUCT DESCRIPTION

Eagle seal weather Sealant is a neutral curing one component silicone sealant that has excellent weather, ageing and UV resistance properties and is specially developed for the weather sealing of structural glazing, angled glazing, wood-glass composite units, roof glazing and conservatories.

APPLICATIONS

Eagle seal weather Sealant is used for weather sealing of structural glazing, angled glazing, wood-glass composite units, roof glazing and conservatories. It is also suitable for joints on insulating glass units and glass elements made of laminated and tempered safety glass

ADVANTAGE

- Neutral cure
- Low odor
- Joint movement capability $\pm 30\%$.

FEATURES

- Excellent weathering, ageing and UV-resistance.
- Non-corrosive.
- High resistance to notches, tension and tearing.
- Excellent adhesion to many substrates.
- Compatible with PVB-foils in laminated safety glass.
- Suitable for insulating glass sealing based on silicone.

PRIMING


Primers are not usually required. However, priming can be made on certain substrates for improved adhesion.

TECHNICAL SPECIFICATION

Physical Properties	Test Method	Typical Value
Basis : One part moisture cure silicone sealant		
Specific gravity		1.2
(Flow (sag or slump	ASTM C-639-01	Non sag
Skin Forming time		minutes 8-10
Tack free time	ASTM C-679	minutes 27
Depth cure		2mm/day
Service Temperature		-40°C to +250°C
Application Temperature		C to +40°C+5
% ,Elongation	ASTM D-412-98a	750
Hardness,shore A	ASTM D-2240-97	30
Peel Strength (N), concrete	ASTM C-794-93	> 35
Accelerated weathering @ 300 hrs	ASTM C-793	No deterioration

SUBSTRATE PREPARATION

Surfaces must be clean, dry and sound. Since new material is often covered with a protective film solvent, wash all surface materials with a wet brush and an oil-free solvent. Use masking tape where bead lines of exact shapes are required. Masking tape should be removed immediately after a bead is completed and before a skin begins to form. An air-operated or hand operated tool may be used to apply the sealant.

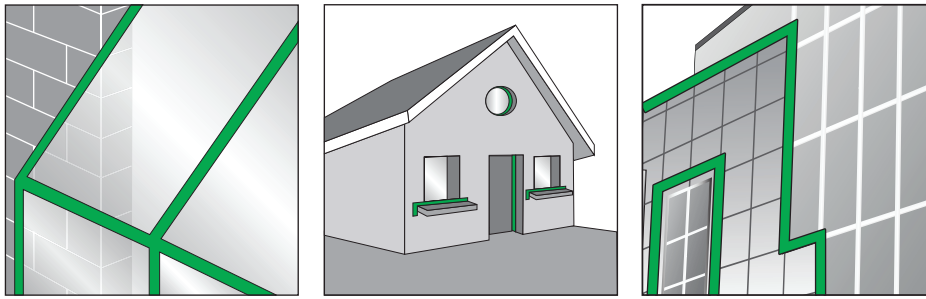

APPLICATION

After suitable joint and substrate preparation, can be gunned into place. Joints must be properly dimensioned as changes are no longer possible after construction. For optimum performance the joint width should be designed according to the movement capability of the sealant based on the actual expected movement. The minimum joint depth is 6 mm and a width / depth ratio of 2:1. For proper joint geometry and to prevent 3 sided adhesion to maximize sealant joint movement capability it is recommended to use compatible closed cell polyethylene or non out gassing polyolefin backer rod. If joints are too shallow for backing material to be employed, we recommend using a polyethylene tape. This acts as a release film, allowing the joint to move and the silicone to stretch freely.

DIRECTIONS FOR USE

- Ensure that surfaces are prepared as above
- Cut tip off cartridge and screw the nozzle onto the cartridge. Cut the tip of nozzle at an angle to achieve the desired bead size

TOOLING AND FINISHING

Tooling and finishing must be carried out within the skin time of the sealant. When tooling freshly applied Eagle seal weather Sealant press the sealant to the joint bond line surface to get a good wetting of the bonding surface.

IMPORTANT INFORMATION

Before applying this product the user has to ensure that the materials in the area of contact (solid, liquid and gaseous) are compatible with it and also amongst each other and do not damage or alter (e.g. discolor) each other. As for the materials that will be used at a later stage in the surrounding area of the product the user has to clarify beforehand that the substances of content or evaporations do not lead to an impairment or alteration (e. g. discolouration) of the product. In case of doubt the user should consult the manufacturer of the material. After curing the product is completely odourless, physiologically harmless and unmodified. The required vulcanization time prolongs with increasing thickness of the silicone layer. One component silicones must not be used for full-surface bonding applications unless special constructional prerequisites are met.

CURING TIME

Cure time is affected by relative humidity, degree of confinement and cross-sectional thickness of the sealant. Eagle seal weather Sealant cures upto 2mm per day.

STORAGE AND SHELF LIFE

Eagle seal weather Sealant has a shelf life of 12 months from date of production when stored in the original unopened containers at or below 35°C. In countries where high heat and humidity are a factor, special precautions must be taken to store the product in a covered, well-ventilated warehouse and avoid excessive heat conditions.

SAFETY

Safety data sheet is available upon request.

COLORS

Eagle seal weather Sealant is available in black and white. Other colors are available upon request.

CLEAN UP

Excess sealant and smears adjacent to the joint interface can be carefully removed with xylene or mineral spirits before the sealant cures. Any utensils used for tooling can also be cleaned with xylene or mineral spirits. Once cured, the material can only be removed mechanically. Hands and exposed skin should be washed immediately using a suitable industrial hand cleaner and water. Do not use solvents!

LIMITATIONS

Cannot be over-painted

PACKAGING

310ml cartridge, 400ml sausage and 600ml sausage.

LOCATIONS

KIGDOM OF SAUDI ARABIA

unitech.ksa@ikkgroup.com

Jeddah

Tel : +966 12 627 8222
Fax: +966 12 627 8722

Jeddah - Ghurab Showroom

Tel : +966 12 667 2000
Fax: +966 12 661 4306

Mak kah/Taif

Tel : +966 12 541 1206
Fax: +966 12 532 1675

Mad inah

Tel : +966 14 842 1095
Fax: +966 14 842 1090

Yanbu

Tel : +966 14 390 1499
Fax: +966 14 322 7101

Khamis Mushayt

Tel : +966 17 237 5929
Fax: +966 17 237 8783

Najran

Tel : +966 17 546 3873
Fax : +966 17 546 3873

Al Baha

Tel : +966 17 237 5929
Fax: +966 17 237 8783

Sharorah

Tel : +966 17 532 8153
Fax: +966 17 532 8153

Gizan

Tel : +966 17 321 6660
Fax: +966 17 321 0665

Riyadh North

Tel : +966 11 415 5465
Fax: +966 11 456 6627

Riyadh South

Tel : +966 11 448 0112
Fax: +966 11 447 7421

Riyadh West

Tel : +966 11 431 6271
Fax: +966 11 431 7642

Riyadh East

Tel : +966 11 448 0112
Fax: +966 11 447 7421

Qassim / Buraidah

Tel : +966 16 382 3946
Fax: +966 16 385 2186

Hail

Tel : +966 16 543 3931
Fax: +966 16 543 3935

Skakah / Qurayyat

Tel : +966 14 626 3904
Fax: +966 14 626 3905

Tabuk

Tel : +966 14 423 5203
Fax: +966 14 423 5203

Hafr el Batin

Tel : +966 13 729 3644
Fax: +966 13 729 3644

Dammam

Tel : +966 13 859 0097
Fax: +966 13 857 8177

Jubail

Tel : +966 13 361 4390
Fax: +966 13 362 4499

Hofuf

Tel : +966 13 530 1474
Fax: +966 13 530 7144

FACTORIES

SFSP - KSA

sfsp.jeddah@ikkgroup.com

Specialized Factory for Steel Products

3rd Industrial City / Jeddah

Tel: +966 12 637 4482
Fax: +966 12 636 1963

SFSP / UAE

sfsp.uae@ikkgroup.com

SIGMA Factory for Steel Products

DIC (Dubai Industrial City)

Tel : +971 4 818 1919

SFSP / Egypt

sfsp.cairo@ikkgroup.com

Specialized Factory for Steel Products

6th of October City Giza

Tel : +20 2 3820 6477
Fax: +20 2 3820 6036

SFSP / Lebanon

sfsp.lebanon@ikkgroup.com

Specialized Factory for Steel Products

Tanayel, Bekaa

Tel: +961 8 514 290
Fax: +961 8 514 291

BAHRAIN

unitech.bahrain@ikkgroup.com

Manama

Tel : +973 17 874 897
Fax: +973 17 789 470

KUWAIT

unitech.kuwait@ikkgroup.com

Kuwait City

Tel : +965 2 4924 937
Fax: +965 2 4924 938

UNITED ARAB EMIRATES

unitech.uae@ikkgroup.com

Dubai - Al Rashidiyah

Tel : +971 4 2591 773
Fax : +971 4 2591 774

Abu Dhabi - Musaffah

Tel: +971 2 552 3393
Fax: +971 2 552 5499

OMAN

unitech.oman@ikkgroup.com

Muscat

Tel : +968 24 591 006
Fax : +968 24 597 006

JORDAN

unitech.jordan@ikkgroup.com

Amman

Tel : +962 6 556 3030
Fax: +962 6 554 7911

Aqaba

Tel : +962 6 556 3030
Fax: +962 6 554 7911

PAKISTAN

unitech.pakistan@ikkgroup.com

Karachi - Clifton

Tel-Fax : +92 21 35826120

EGYPT

unitech.egypt@ikkgroup.com

Cairo 6th of October City

Tel : +20 2 3820 6477
Fax: +20 2 3820 6036

LEBANON

unitech.lebanon@ikkgroup.com

Beirut

Tel : +961 1 858 277
Fax: +961 1 858 276

ENGINEERING, DESIGN, MARKETING & MULTIMEDIA

Unitech Deutschland GmbH

Germany

unitech.germany@ikkgroup.com

Stuttgart

Tel : +49 711 6868 7222
Fax: +49 711 6868 7223

Multi-D s.a.r.l

Lebanon

multi-d@ikkgroup.com

Multi-d Beirut

Tel : +961 1 841 155
Fax: +961 1 841 156

R&D DEPARTMENT

Saih Suhaib-3, Opp DEWA Substation, Dubai Industrial City, Dubai, UAE

Tel : +971 4 818 1944 - Mob: +971 55 517 0841

Email: unitech.uae@ikkgroup.com - abed.demachkieh@ikkgroup.com